

# Sentinel® MH

COMPACT, HIGH-RESOLUTION INDUSTRIAL LEAK TESTER



## Description

The SENTINEL MH is an advanced high-speed multi-function leak test instrument. It provides high-resolution leak test measurements with fast and repeatable results in a compact modular design allowing placement closer to the part.

## APPLICATIONS

- Automotive
- Powertrain
- Consumer Goods
- Energy
- HVAC/R
- Medical
- Consumer Electronics
- Other Transportation

## Highlights

- ✓ 32 test programs
- ✓ High-resolution
- ✓ CTSnet LT PC application interface
- ✓ Live data streaming
- ✓ Stores up to 5000 test results
- ✓ Cost-effective

## Specifications

Housing (HxWxD)	6.5 x 3.5 x 8.5 in (165 x 90 x 215 mm) See mounting and clearance diagrams
Electrical	24 VDC +/- 1% 1.5 Amps
Air Quality	ISO 8573-1:2010 [2:2:2] Compressed air or nitrogen only
Pressure Regulation	External (customer supplied) or Internal Electronic regulator
Test Pressure	Vac - 200 psig
Pilot Pressure	55 - 70 psig (3.8 - 4.8 bar)
Operating Temperature	41-104° F (5-40° C)
Operating Humidity	90% non-condensing
I/O	7 Inputs / 5 Outputs
Instrument Weight	4.9 lbs (2.2 kg)

## Test Capabilities

- Differential Pressure/Vacuum Decay -  $\Delta P$
- Differential Pressure/Vacuum Decay -  $\Delta P/\Delta T$
- Differential Pressure/Vacuum Decay - Leak Standard
- Differential Pressure/Vacuum Decay - Leak Rate
- Occlusion (Back Pressure)

## Interfaces

- Communication via RS232, TCP/IP (Telnet), and EtherNet/IP™
- Tooling control for simple applications
- I/O: 7 inputs / 5 outputs independently set per test program

## Measurement Characteristics

Measurement Accuracy*	$\pm 0.006\%$ FS
Measurement Resolution	0.000001 $\Delta$ psi
Leak Rate Resolution	0.00005 sccm

\*Consult factory for details


## Options

- Electronic regulator
- Multiple pressure ranges
- External leak standard port

## Accessories

- Calibrated leak standard
- CTS Connects
- Calibrated adjustable leak simulator
- Filter kit

## Mounting and Clearance Position

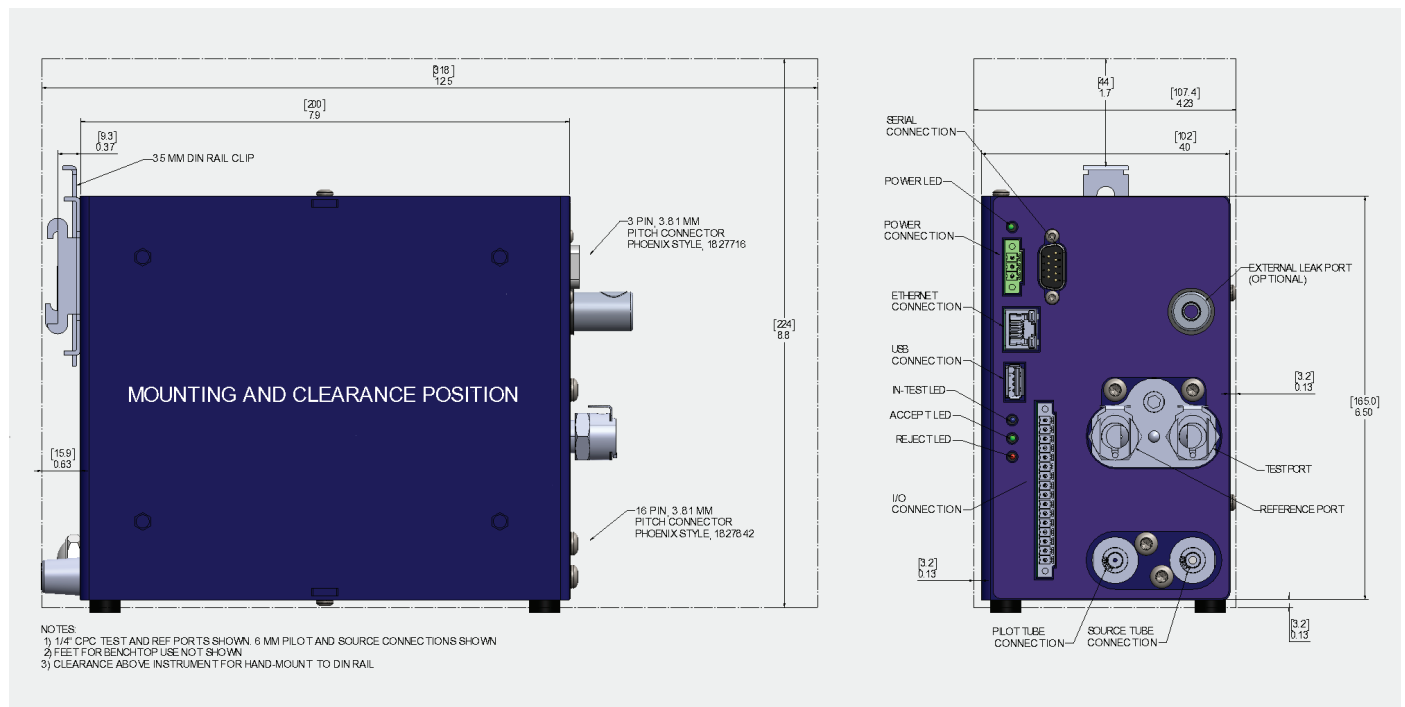

## CTSnet LT

- Intuitive user interface that allows easy control right from your PC
- Connect → Configure → Run a test (Start/Stop) → Read results
- Monitor test in real-time
- Export configuration, calibrations, and results

